



biosweet

Biomass for Swiss Energy Future
Swiss Competence Center for Energy Research

Supported by:



Schweizerische Eidgenossenschaft
Confédération suisse
Confederazione Svizzera
Confederaziun svizra


Swiss Confederation

Innosuisse – Swiss Innovation Agency

Methanation

Enrich biogas to biomethane and get grid quality



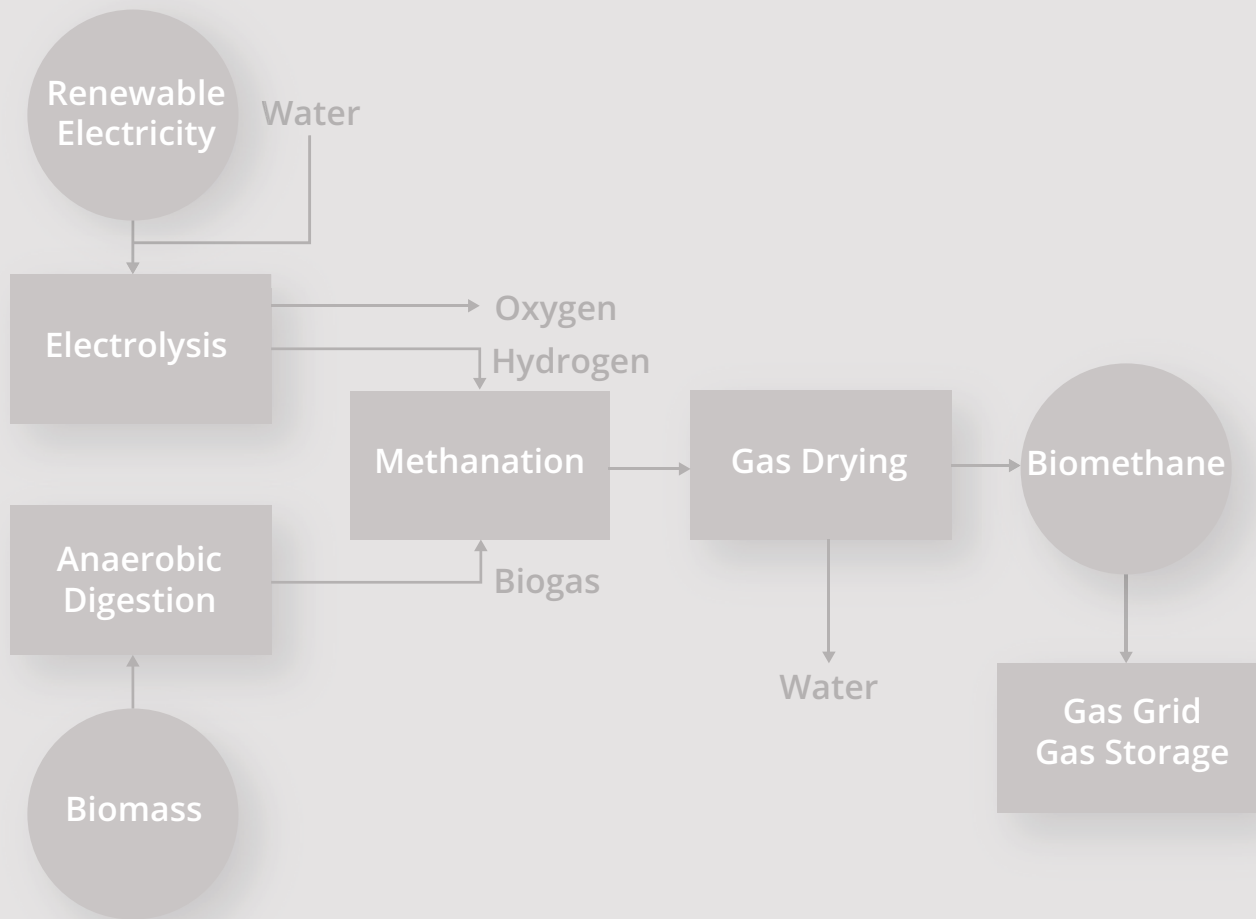

Basic Principles of Biogas Methanation

Biogas + Renewable Electricity = Gas Storage + Flexibility

Biogas from anaerobic digestion consists of roughly 60 % methane and 40 % CO₂. The CO₂ can be converted into additional methane by utilizing surplus electricity from renewable generation and water. This way, the biogas can be upgraded into 100% biomethane which can be fed into the gas grid for consumption on demand and flexible storage.

The conversion process comprises two major steps: the production of hydrogen from water within an electrolyser (this is where the renewable electricity is consumed) and the combination of this hydrogen with CO₂ from the biogas into methane. While electrolysers are available off the shelf, the second step, the actual methanation reaction, needs further research. Basically, two technologies are feasible for this reaction: the biological methanation and the catalytic methanation. Their suitability depends mainly on the site conditions of the biogas plant. The SCCER BIOSWEET is looking into both of them to develop the best solutions for the various site conditions in Switzerland and for the intermittent supply of renewable electricity.

Methanogenesis – the Biological Methanation

The biological form of methanation is called 'methanogenesis'. A certain type of micro-organisms, the 'methanogens', can produce methane by just consuming carbon dioxide and hydrogen. The biological process takes place at very mild conditions close to ambient pressure and temperature. In nature, the methanogens are ubiquitous. They prefer wet, anoxic (oxygen-free) environments such as sediments and muds of various aquatic habits or in the rumen of animals. In technology, they are already employed in biogas and anaerobic waste water treatment plants but not for the production of pure methane.

This new purpose requires new process designs. At the SCCER BIOSWEET we develop in-situ concepts, where the methanation happens inside the biogas fermenter, as well as ex-situ concepts, where methanation happens in separate bioreactors. The goal is to minimize over all vessel volumes and internal energy consumption but to



maximize operational stability and flexibility. Another criterion is the purity of the methane in order to avoid additional gas treatment before grid feed-in.

Suitable Feedstock

- > Biogas from anaerobic digestion and anaerobic waste water treatment
- > Other off-gases with high CO₂-content

Marketable Product

- > Biomethane
- > Process heat at 65°C

Catalytic Fluidised Bed Methanation

The research team of the SCCER BIOSWEET developed already a catalytic process to convert wood gas to biomethane. Based on this experience, we develop a process to catalytically convert biogas to biomethane. The concept is based on the fluidised bed technology. By fluidising the catalyst particles, optimal heat transfer and a compact reactor design can be achieved. The continuous movement of the catalyst particles in the gas stream enables to minimise steam addition and to avoid the deactivation of the catalyst by carbon deposition.

The conversion of CO₂ with hydrogen to methane, the actual methanation reaction, is strongly exothermic. This heat energy can be retrieved from the catalytic reactor at a level of 200°C to 250°C. The high temperature level supports a number of heat integration opportunities like biomass hygienisation, district heating or within the anaerobic digestion.

Upstream to the catalytic methanation, the raw biogas passes a gas cleaning step contingent to the biogas source. Downstream, the biomethane needs drying to get ready for grid feed-in. The research scope of the SCCER BIOSWEET covers this entire process chain.

Marketable Product

- > Biomethane
- > Process heat at 200°C – 250°C



**Catalytic methanation pilot reactor
at the Paul Scherrer Institute**

Suitable Feedstock

- > Biogas from anaerobic digestion and anaerobic waste water treatment



Technology Readiness and Roadmap 2020

By 2022, the combined research projects on biological and catalytic methanation of biogas will provide verified recommendations to select the most suitable methanation technology for the relevant biogas sites in Switzerland and to specify the plant and process parameters. Both projects cooperate already with established industrial partners to ensure market relevance and a seamless transfer of technology.

Biological Methanation

From 2019 onwards, we describe in-situ methanation strategies for common fermenter designs and related mass and energy balances. In 2020, we commission an ex-situ testing facility in our lab. 2020 until 2022 are dedicated to testing and scale-up of pilot installations at a biogas plant. Analysis of the in-situ and ex-situ results will allow to finalize a validated reactor model by 2023.

Catalytic Methanation

In 2017, the robustness of the process was demonstrated in long term operation (> 1000 h) of a 10 kW test installation at an industrial biogas site. 200 kW pilot plant has been commissioned in 2019. Tests with model gas are scheduled for 2020. Both test series will deliver data to validate the process model and to scale-up the design for an industrial demonstration plant.

Research Contact

Biological Methanation:

Judith Krautwald

Zürich University of Applied Sciences (ZHAW)

+41 (0) 58 934 52 67

judith.krautwald@zhaw.ch

www.zhaw.ch/icbt/umweltbiotech

Catalytic Methanation:

Tilman Schildhauer

Paul Scherrer Institute (PSI)

+41 (0)56 310 27 06

tilman.schildhauer@psi.ch

<http://tpe.web.psi.ch>

Technology Transfer Contact

Markus Zeifang

markus.zeifang@psi.ch

+41 (0)56 310 50 92

www.sccer-biosweet.ch

